




Optional Adjustable nozzle

exchangeable dosing nozzles in various sizes

# Turbo ULV

pneumatic cold fogging unit, portable manufactured in cooperation with pulsFOG do Brazil

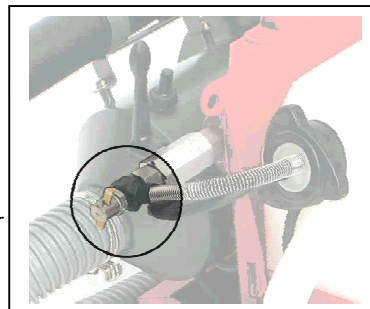

### Technical Data:

Packing dimensions (length x breadth x height):	59 x 35 x 37 cm
Weight :	6,6 kg net, 8,3 kg gross
Capacity of solution tank :	nominal 5 Liter
Power supply:	<b>230 V AC / 50-60 Hz</b>
Electrical power rating:	1,0 kW
Effective fog throwing range:	max. 25 m
Droplet size dependent on nozzle size used:	10 to 100 µm
Flow rate:	Dosing nozzle 0,7 mm / 5,3 l/h Dosing nozzle 0,8 mm / 7,7 l/h Dosing nozzle 1,0 mm / 10,8 l/h max. 48 l/h with screw for dosing nozzle

### Standard accessories:

Shoulder strap  
solution funnel  
preliminary filter  
Dosing nozzle size 7, 8, 10  
sealing rings

### Optional accessory:

adjustable nozzle  
Cable 15 m with plug  
wooden box



The **Turbo ULV** is a portable, electrically operated pneumatic cold fogger. Its high performance turbine creates a strong warm air stream of up to 50 l/s (free blowing). The formulation of biocide is atomised into a fine aerosol, which is adjustable from approx. 10 to 100 µm dependent on flow rate (nozzle size used). The precise flow regulation is provided by means of interchangeable nozzles. Nozzles and fogging conduits withstand weaker acids and bases with pH-value 5 – 9.

### Technical features:

- Trouble free and simple operation.
- High mobility due to small dimensions, low weight and extended fogging tube.
- Detachable solution tank for easy filling and cleaning
- No "fallout" of large droplets in the vicinity of the fogger.
- No choking of nozzle when using wettable powder.

Subject to technical changes 10/2009



**pulsFOG Dr. Stahl & Sohn GmbH**

Abigstraße 8 • D-88662 Überlingen • Tel. (0) 7551 / 9261-0 • Fax (0) 7551 / 926161  
E-Mail: info@pulsfog.com • Internet: http://www.pulsfog.com